


# Date Stamps

## High Temperature Date Stamp

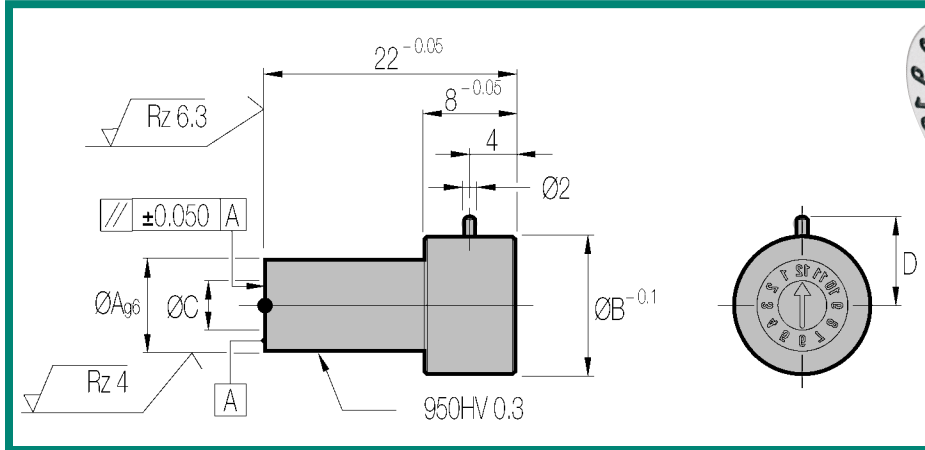


- Material is 1.2344 Nitrided (insert) and Inconel 2.4669 (body)
- Maximum working temperature is 450° C
- Designed for tools which operate at high temperatures
- Ideal for Zinc, Polyester, Bakelite and similar materials

12 Months	12 Months + Year <sup>1</sup>	Years <sup>2</sup>	A	B	C	D	No. of Years
FT.0847SF	FT.084712-__	FT.084705-__	8	12	4.7	11	5
FT.1267SF	FT.126712-__	FT.126708-__	12	16	6.7	12	8


- (1) When ordering, add the year required to the part number (FT.084712-11)
- (2) When ordering, add the start year to the part number (FT.084705-11)




## High Temperature Inserts

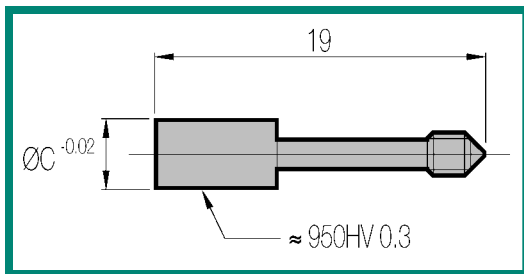

- Material is 1.2344 Nitrided
- Insert changes can be done while the tool is still in the press

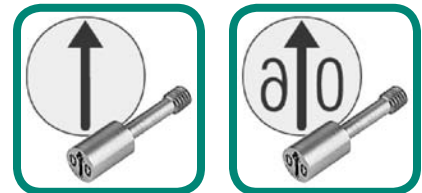

Arrow only	Arrow & Year <sup>1</sup>	C
IT.4719SF	IT.4719 __	4.7
IT.6719SF	IT.6719 __	6.7

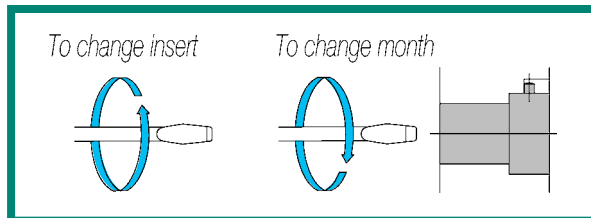

- (1) When ordering, add the year required to the part number (IT.479111)

CAD files and flash demo at:  
**CUMSA**  
[www.cumsa.com](http://www.cumsa.com)