



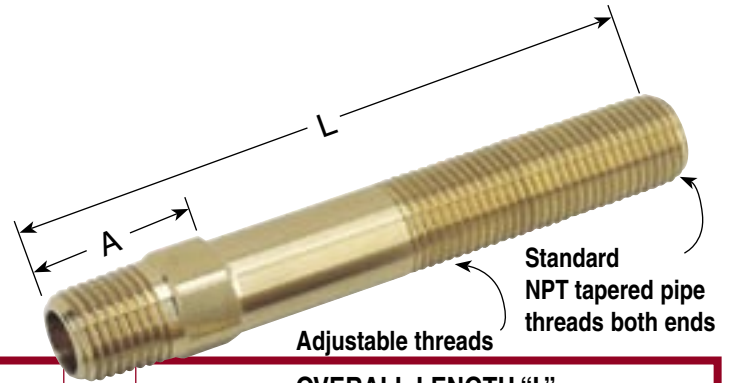

- Especially useful when installing Cascade Heads, Hex Elbows, etc.
- Longer or special lengths are available.
- Available in special thread combinations.

CATALOG NUMBER	PIPE SIZE (NPT)	A	HEX SIZE	OVERALL LENGTH "L"							
				2-1/2"	4"	5-1/2"	7"	8-1/2"	10"	11-1/2"	12"
APN16	1/16	11/16	3/8	X025	X040	X055	X070	X085	X100	X115	X130
APN18	1/8	3/4	7/16	X025	X040	X055	X070	X085	X100	X115	X130
APN14	1/4	7/8	9/16	X025	X040	X055	X070	X085	X100	X115	X130
APN38	3/8	1"	11/16	X025	X040	X055	X070	X085	X100	X115	X130
APN12	1/2	1-3/8	7/8	X025	X040	X055	X070	X085	X100	X115	X130

To order, add overall length to catalog number. Example: APN16X025

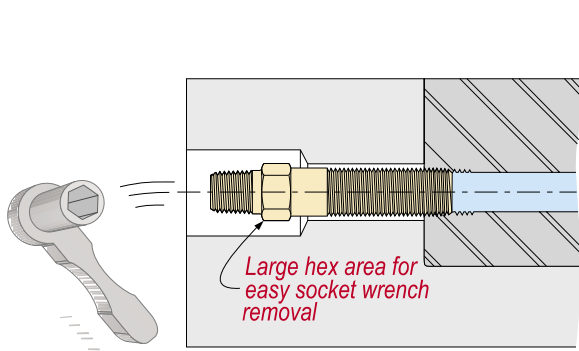

Brass Pipe Nipples

CATALOG NUMBER	PIPE SIZE (NPT)	OVERALL LENGTH																
		CLOSE	1-1/2	2"	2-1/2	3"	3-1/2	4"	4-1/2	5"	5-1/2	6"	7"	8"	9"	10"	11"	12"
BPN16	1/16	X000	X015	X020	X025	X030	X035	X040	X045	X050	X055	X060	X070	X080	X090	X100	X110	X120
BPN18	1/8	X000	X015	X020	X025	X030	X035	X040	X045	X050	X055	X060	X070	X080	X090	X100	X110	X120
BPN14	1/4	X000	X015	X020	X025	X030	X035	X040	X045	X050	X055	X060	X070	X080	X090	X100	X110	X120
BPN38	3/8	X000	X015	X020	X025	X030	X035	X040	X045	X050	X055	X060	X070	X080	X090	X100	X110	X120
BPN12	1/2	X000	X015	X020	X025	X030	X035	X040	X045	X050	X055	X060	X070	X080	X090	X100	X110	X120

To order, add overall length to catalog number. Example: BPN16X025





Galvanized Pipe Nipples

CATALOG NUMBER	PIPE SIZE (NPT)	OVERALL LENGTH																
		CLOSE	1-1/2	2"	2-1/2	3"	3-1/2	4"	4-1/2	5"	5-1/2	6"	7"	8"	9"	10"	11"	12"
GPN16*	1/16	X000	X015	X020	X025	X030	X035	X040	X045	X050	X055	X060	X070	X080	X090	X100	X110	X120
GPN18	1/8	X000	X015	X020	X025	X030	X035	X040	X045	X050	X055	X060	X070	X080	X090	X100	X110	X120
GPN14	1/4	X000	X015	X020	X025	X030	X035	X040	X045	X050	X055	X060	X070	X080	X090	X100	X110	X120
GPN38	3/8	X000	X015	X020	X025	X030	X035	X040	X045	X050	X055	X060	X070	X080	X090	X100	X110	X120
GPN12	1/2	X000	X015	X020	X025	X030	X035	X040	X045	X050	X055	X060	X070	X080	X090	X100	X110	X120

To order, add overall length to catalog number. Example: GPN16X025

* 1/16 pipe nipples are stainless steel.

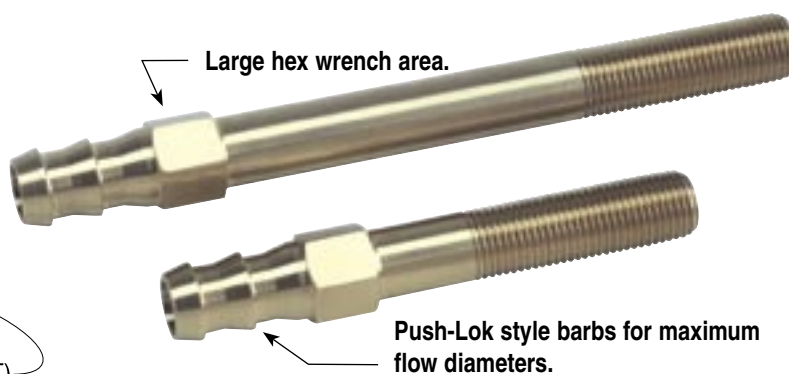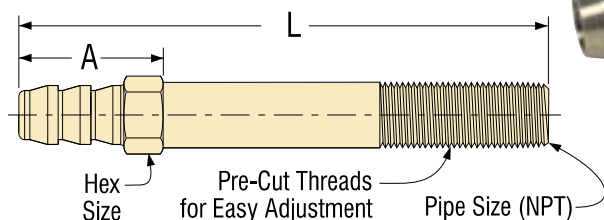

- One piece brass construction.
- Hose clamps are not required when used with Push-Lok hose.

CATALOG NUMBER	HOSE I.D.	PIPE SIZE (NPT)	HEX SIZE	A	OVERALL LENGTH "L"							
					2-1/2	4"	5-1/2	7"	8-1/2	10"	11-1/2	13"
EB14-1	1/4	1/16	3/8	1-1/8	X025	X040	X055	X070	X085	X100	X115	X130
EB14-2	1/4	1/8	7/16	1-1/8	X025	X040	X055	X070	X085	X100	X115	X130
EB38-2	3/8	1/8	1/2	1-1/4	X025	X040	X055	X070	X085	X100	X115	X130
EB38-4	3/8	1/4	9/16	1-3/8	X025	X040	X055	X070	X085	X100	X115	X130
EB50-4	1/2	1/4	5/8	1-1/2	X025	X040	X055	X070	X085	X100	X115	X130
EB50-6	1/2	3/8	11/16	1-1/2	X025	X040	X055	X070	X085	X100	X115	X130
EB50-8	1/2	1/2	7/8	1-5/8	X025	X040	X055	X070	X085	X100	X115	X130
EB75-8	3/4	1/2	7/8	2-1/8	X025	X040	X055	X070	X085	X100	X115	X130

To order, add overall length to catalog number. Example: EB14-1X025

CATALOG NUMBER	HOSE I.D.	PIPE SIZE (NPT)
PLM-04-02	1/4	1/8
PLM-04-04	1/4	1/4
PLM-06-02	3/8	1/8
PLM-06-04	3/8	1/4
PLM-08-04	1/2	1/4
PLM-08-06	1/2	3/8
PLM-08-08	1/2	1/2
PLM-08-12	1/2	3/4
PLM-12-08	3/4	1/2
PLM-12-12	3/4	3/4

Push-Lok Hose Barbs



- All Push-Lok Hose fittings are constructed of brass and do not require hose clamps when used with Push-Lok hose.
- Flow diameters are maximized for improved flow rates.

Push-Lok Hose - 801 Series



- Constructed of synthetic rubber tube, one textile braide reinforcement, and synthetic rubber cover.
- Temperature range with water to 185° F.
- Use with Push-Lok or standard fittings.

CATALOG NUMBER	HOSE I.D.	HOSE O.D.	WORKING PRESSURE (PSI)	BURST PRESSURE (PSI)	MINIMUM BEND RADIUS (IN.)	INCHES OF MERCURY
801-4	1/4	0.50	250	1000	2-1/2	28
801-6	3/8	0.63	250	1000	3"	28
801-8	1/2	0.78	250	1000	5"	28
801-10	5/8	0.91	250	1000	6"	15
801-12	3/4	1.03	250	1000	7"	15

Grey hose is standard.

Minimum order length is 10'

To order, add color code and length to catalog number. Example for 100' of 1/4 I.D. red: 801-4-R-100'

Color codes: (Red=R) (Grey=GR) (Yellow=Y) (Green=G) (Black=B) (Blue=BL)