


## **HIGH HARDNESS**

## SLK-8-HH

Rated to carry a weight up to 8 pounds. 100% interchangeable with SLK-8A

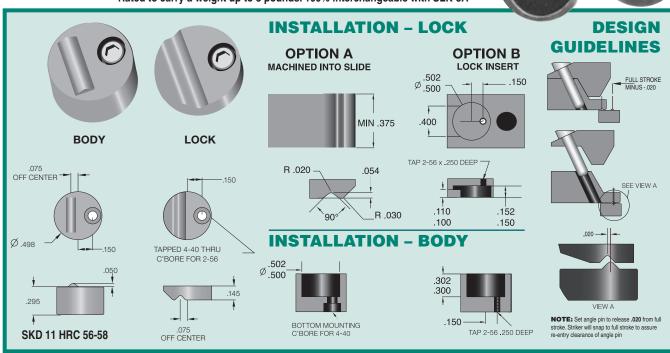

## SLK-25-HH Rated to carry a weight up to 25 pounds. 100% interchangeable with SLK-25A TAPPED 10-32 FOR BOTTOM MOUNTING C'BORE 6-32 SHCS FOR TOP MOUNTING .100 1 490 1.490 .249 **BODY LOCK** LARGE LEAD IN TAPER & RADIUS SKD 11 HRC 56-58 .620 **INSTALLATION - LOCK OPTION B** LOCK INSERT **OPTION A** MACHINED INTO SLIDE R .047 FULL STROKE MINUS -.030 1.500 .875 MIN .750 1.100 - R 083 \_ TAP 8-32 313B BODY SEE VIEW A .500 VIEW A NOTE: Set angle pin to release .030 from full BOTTOM MOUNTING -TAP 6-32 stroke. Striker will snap to full stroke to assure re-entry clearance of angle pin

## **MACHINING DATA**

Slide-Latch model SLK-50HH is rated to carry a weight of up to 50 pounds. Ideal for die cast mold slide applications. Multiple Slide-Latches can be easily machined and mounted in mold slides for higher load retentions.



