
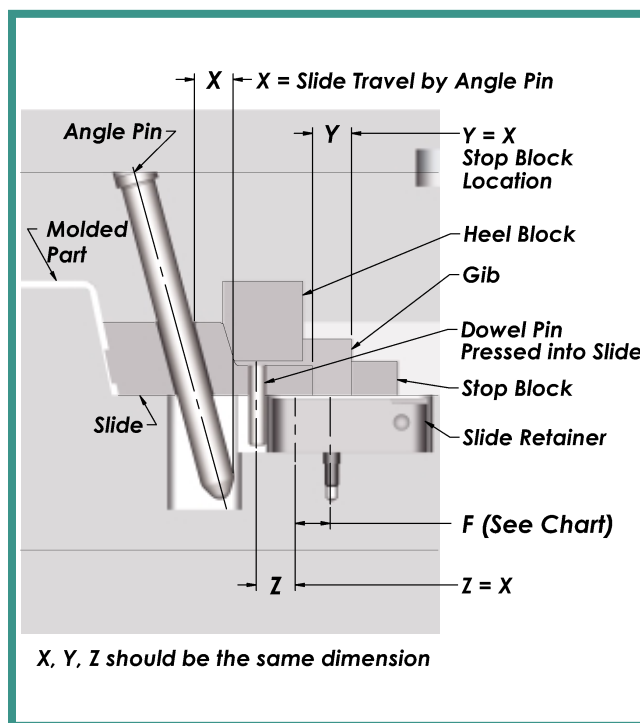


- A compact method of slide retention that eliminates the use of springs or costly hydraulic systems.
- Interference with machine tie bars or safety gates is eliminated because the slide retainer can be installed behind or below the slide.
- They can be used in multiples for larger or heavier slides.

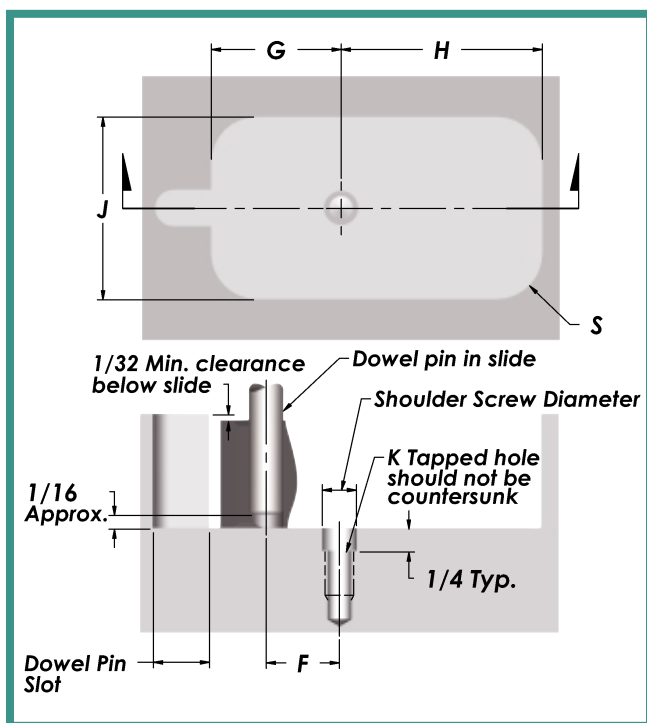

| Catalog Number | A     | B     | C    | D    | E    | F    | R   | Dowel Pin    | Maximum Slide Weight | G    | H    | J    | Tapped Hole K | Shoulder Screw | S   |
|----------------|-------|-------|------|------|------|------|-----|--------------|----------------------|------|------|------|---------------|----------------|-----|
| SRP-22         | 1-1/2 | 3/4   | .63  | .89  | .61  | .360 | .19 | 1/4 X 1-1/4  | 22 Pounds            | .73  | 1.01 | 1.00 | 10-24 X 1/2   | 1/4 X 5/8      | .31 |
| SRP-44         | 2-1/8 | 1-1/4 | .79  | 1.31 | .81  | .500 | .25 | 5/16 X 1-1/2 | 44 Pounds            | .93  | 1.43 | 1.50 | 1/4-20 X 1/2  | 5/16 X 3/4     | .37 |
| SRP-88         | 3-3/8 | 1-3/4 | 1.18 | 2.08 | 1.30 | .800 | .38 | 3/8 X 2-1/4  | 88 Pounds            | 1.42 | 2.20 | 2.20 | 5/16-18 X 5/8 | 3/8 X 1"       | .50 |