

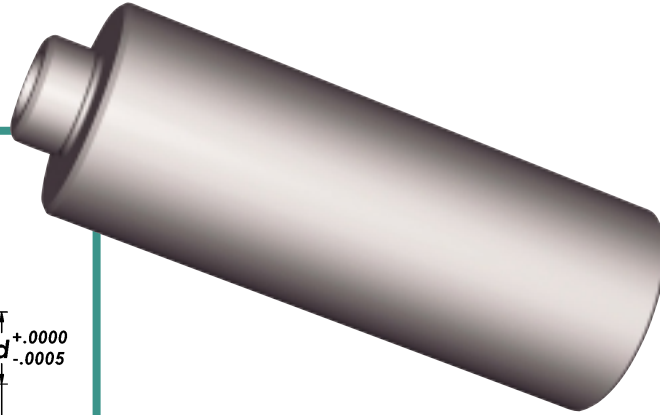


Guided Ejection Support Pillars

Inch

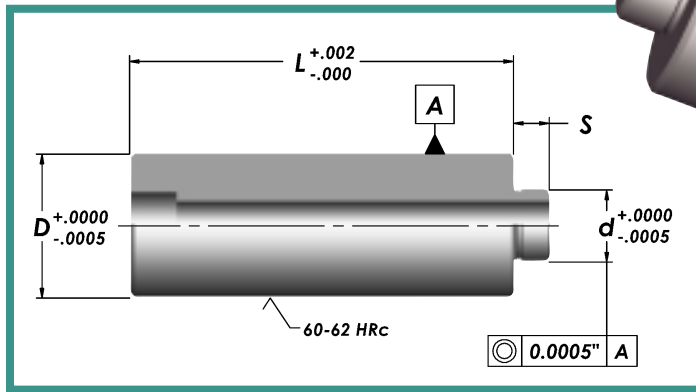


D	d	S	CATALOG NUMBER						
			L=2-1/2	L=3"	L=3-1/2	L=4"	L=4-1/2	L=5"	L=6"
3/4	.468	.281	SSP07525	SSP07530	SSP07535	SSP07540			
1"	.500	.312	SSP10025	SSP10030	SSP10035	SSP10040	SSP10045		
1-1/4	.687	.312	SSP12525	SSP12530	SSP12535	SSP12540	SSP12545	SSP12550	SSP12560
1-1/2	.750	.375	SSP15025	SSP15030	SSP15035	SSP15040	SSP15045	SSP15050	SSP15060
2"	.750	.375	SSP20025	SSP20030	SSP20035	SSP20040	SSP20045	SSP20050	SSP20060

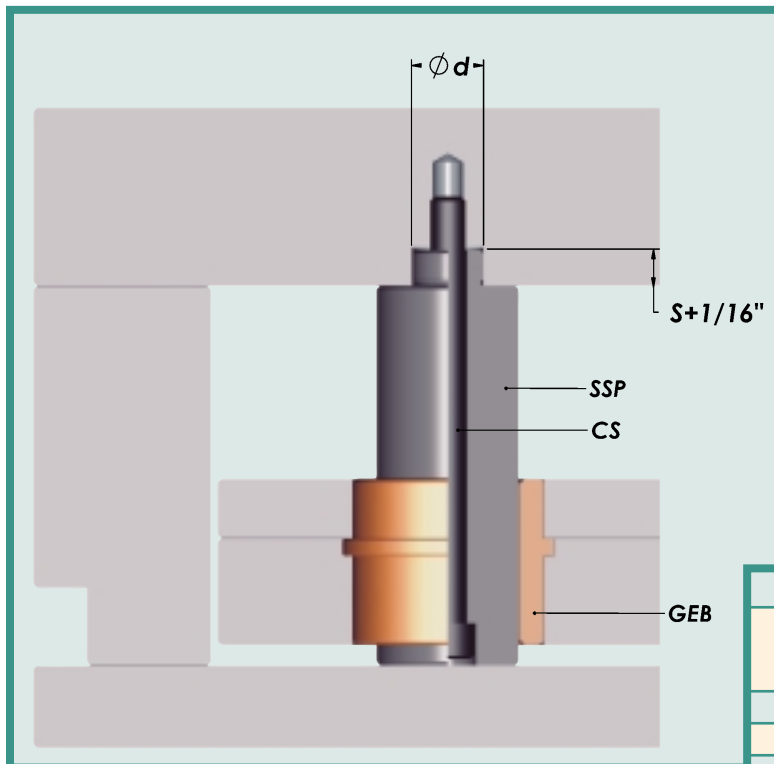

- Available in standard lengths.
- Case hardened.
- For use with any standard guided ejector bushing.
- Bottom clamp plate machining is not required.
- No press fit concerns.
- Ejector set machining is significantly reduced.


DESIGN INFORMATION			
D	Depth of reamed hole for 'd'	Tapped hole depth for capscrew	Capscrew (supplied)
3/4	.343	.468	1/4-20 x L+.250
1"	.375	.562	5/16-18 x L+.500
1-1/4	.375	.562	5/16-18 x L+.500
1-1/2	.437	.656	3/8-16 x L+.500
2"	.437	.656	3/8-16 x L+.500

Tapped

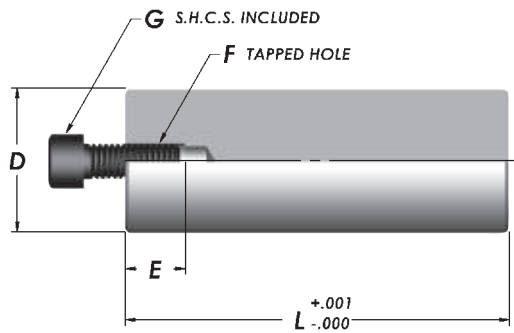

D	E	F	G	CATALOG NUMBER							
				L=2-1/2"	L=3"	L=3-1/2"	L=4"	L=4-1/2"	L=5"	L=6"	L=8"
1"	5/8	3/8-16	3/8-16x1"	SP1090	SP1091	SP1092	SP1093	SP1094			
1-1/4"	5/8	3/8-16	3/8-16x1"	SP1130	SP1131	SP1132	SP1133	SP1134	SP1135	SP1136	
1-1/2"	5/8	3/8-16	3/8-16x1"	SP1140	SP1141	SP1142	SP1143	SP1144	SP1145	SP1146	
2"	5/8	3/8-16	3/8-16x1"	SP1150	SP1151	SP1152	SP1153	SP1154	SP1155	SP1156	
3"	1-1/4	5/8-11	none						SP1235	SP1236	SP1238

Stop Pins

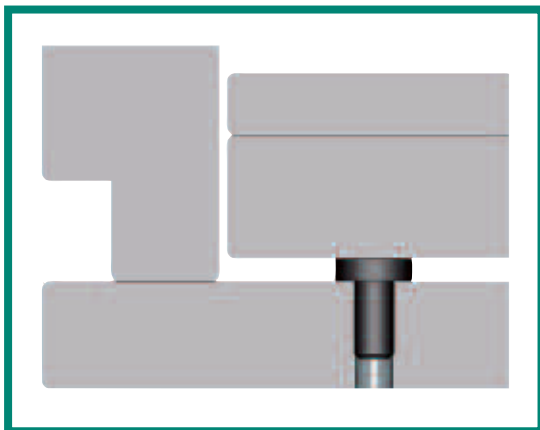

Standard

- Head thickness is .020 oversize to provide grinding stock.
- Catalog Number SB-001



Hardened and Self Tapping

- Head thickness has grind stock.
- Use with 11/32 drilled hole.
- Catalog Number SB-001ST

